




HIGH PERFORMANCE ENDMILL

PT1-SC

SQUARE | CORNER RADIUS

www.mstm.co.in

CODE DESCRIPTION

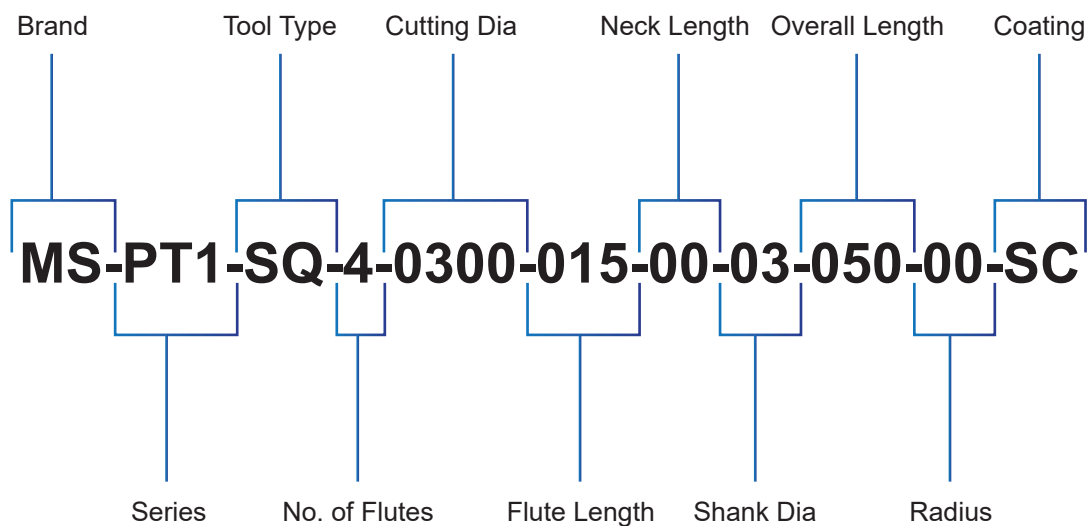

Tool Type:

SQ - Square End mill

CR - Corner Radius End mill

No. of Flutes:

4 - 4 Flute

5 - 5 Flute


PT1-SC

- ▶ High performance tooling solution for stainless steel alloys and titanium alloys in the aerospace & mining industry.
- ▶ Premium carbide grade allows for excellent edge sharpness resulting in smooth cutting.
- ▶ Special unequal geometry results in vibration-free machining and no chatter marks on the work-piece surface.
- ▶ Newest-generation of TiAlSiN-based coating with HiPIMS technology, SteelCon coating provides extreme wear resistance at extreme cutting temperatures, and exotic material machining. High hot hardness and diffusion wear resistance increases process stability and helps to combat the work-hardening nature of SS & Ti alloys.
- ▶ Recommended for machining of austenitic, martensitic, duplex alloys of stainless steel & α , β alloys of titanium found in the aerospace industry.






P	M	K	N	S	H
●	●	●		○	
● Recommended ○ Good					

SQUARE END MILL



CORNER RADIUS END MILL



Note: R = RD (CR Radius)



units in mm

SQUARE END MILL - Z4

CODE	DC	DCON	APMX	OAL
MS-PT1-SQ-4-0300-050-00-06-050-00-SC	3	6	5	50
MS-PT1-SQ-4-0300-080-00-06-057-00-SC	3	6	8	57
MS-PT1-SQ-4-0400-080-00-06-054-00-SC	4	6	8	54
MS-PT1-SQ-4-0400-110-00-06-057-00-SC	4	6	11	57
MS-PT1-SQ-4-0500-090-00-06-054-00-SC	5	6	9	54
MS-PT1-SQ-4-0500-130-00-06-057-00-SC	5	6	13	57
MS-PT1-SQ-4-0600-100-00-06-054-00-SC	6	6	10	54
MS-PT1-SQ-4-0600-130-00-06-057-00-SC	6	6	13	57
MS-PT1-SQ-4-0800-120-00-08-058-00-SC	8	8	12	58
MS-PT1-SQ-4-0800-190-00-08-063-00-SC	8	8	19	63
MS-PT1-SQ-4-1000-140-00-10-066-00-SC	10	10	14	66
MS-PT1-SQ-4-1000-220-00-10-072-00-SC	10	10	22	72
MS-PT1-SQ-4-1200-160-00-12-073-00-SC	12	12	16	73
MS-PT1-SQ-4-1200-260-00-12-083-00-SC	12	12	26	83
MS-PT1-SQ-4-1400-180-00-14-075-00-SC	14	14	18	75
MS-PT1-SQ-4-1400-260-00-14-083-00-SC	14	14	26	83
MS-PT1-SQ-4-1600-220-00-16-082-00-SC	16	16	22	82
MS-PT1-SQ-4-1600-320-00-16-092-00-SC	16	16	32	92
MS-PT1-SQ-4-1800-240-00-18-084-00-SC	18	18	24	84
MS-PT1-SQ-4-1800-320-00-18-092-00-SC	18	18	32	92
MS-PT1-SQ-4-2000-260-00-20-092-00-SC	20	20	26	92
MS-PT1-SQ-4-2000-380-00-20-104-00-SC	20	20	38	104



units in mm

SQUARE END MILL - Z5

CODE	DC	DCON	APMX	OAL
MS-PT1-SQ-5-0300-050-00-06-050-00-SC	3	6	5	50
MS-PT1-SQ-5-0300-080-00-06-057-00-SC	3	6	8	57
MS-PT1-SQ-5-0400-080-00-06-054-00-SC	4	6	8	54
MS-PT1-SQ-5-0400-110-00-06-057-00-SC	4	6	11	57
MS-PT1-SQ-5-0500-090-00-06-054-00-SC	5	6	9	54
MS-PT1-SQ-5-0500-130-00-06-057-00-SC	5	6	13	57
MS-PT1-SQ-5-0600-100-00-06-054-00-SC	6	6	10	54
MS-PT1-SQ-5-0600-130-00-06-057-00-SC	6	6	13	57
MS-PT1-SQ-5-0800-120-00-08-058-00-SC	8	8	12	58
MS-PT1-SQ-5-0800-190-00-08-063-00-SC	8	8	19	63
MS-PT1-SQ-5-1000-140-00-10-066-00-SC	10	10	14	66
MS-PT1-SQ-5-1000-220-00-10-072-00-SC	10	10	22	72
MS-PT1-SQ-5-1200-160-00-12-073-00-SC	12	12	16	73
MS-PT1-SQ-5-1200-260-00-12-083-00-SC	12	12	26	83
MS-PT1-SQ-5-1400-180-00-14-075-00-SC	14	14	18	75
MS-PT1-SQ-5-1400-260-00-14-083-00-SC	14	14	26	83
MS-PT1-SQ-5-1600-220-00-16-082-00-SC	16	16	22	82
MS-PT1-SQ-5-1600-320-00-16-092-00-SC	16	16	32	92
MS-PT1-SQ-5-1800-240-00-18-084-00-SC	18	18	24	84
MS-PT1-SQ-5-1800-320-00-18-092-00-SC	18	18	32	92
MS-PT1-SQ-5-2000-260-00-20-092-00-SC	20	20	26	92
MS-PT1-SQ-5-2000-380-00-20-104-00-SC	20	20	38	104



CORNER RADIUS END MILL - Z4



units in mm

CODE	DC	DCON	APMX	OAL	RD (CR RADIUS)
MS-PT1-CR-4-0300-050-00-06-050-RD-SC	3	6	5	50	0.3, 0.5
MS-PT1-CR-4-0300-080-00-06-057-RD-SC	3	6	8	57	0.3, 0.5
MS-PT1-CR-4-0400-080-00-06-054-RD-SC	4	6	8	54	0.3, 0.5
MS-PT1-CR-4-0400-110-00-06-057-RD-SC	4	6	11	57	0.3, 0.5
MS-PT1-CR-4-0500-090-00-06-054-RD-SC	5	6	9	54	0.5, 1.0
MS-PT1-CR-4-0500-130-00-06-057-RD-SC	5	6	13	57	0.5, 1.0
MS-PT1-CR-4-0600-100-00-06-054-RD-SC	6	6	10	54	0.5, 1.0
MS-PT1-CR-4-0600-130-00-06-057-RD-SC	6	6	13	57	0.5, 1.0
MS-PT1-CR-4-0800-120-00-08-058-RD-SC	8	8	12	58	0.5, 1.0
MS-PT1-CR-4-0800-190-00-08-063-RD-SC	8	8	19	63	0.5, 1.0
MS-PT1-CR-4-1000-140-00-10-066-RD-SC	10	10	14	66	0.5, 1.0
MS-PT1-CR-4-1000-220-00-10-072-RD-SC	10	10	22	72	0.5, 1.0
MS-PT1-CR-4-1200-160-00-12-073-RD-SC	12	12	16	73	0.5, 1.0, 2.0
MS-PT1-CR-4-1200-260-00-12-083-RD-SC	12	12	26	83	0.5, 1.0, 2.0
MS-PT1-CR-4-1400-180-00-14-075-RD-SC	14	14	18	75	1.0, 2.0
MS-PT1-CR-4-1400-260-00-14-083-RD-SC	14	14	26	83	1.0, 2.0
MS-PT1-CR-4-1600-220-00-16-082-RD-SC	16	16	22	82	1.0, 2.0
MS-PT1-CR-4-1600-320-00-16-092-RD-SC	16	16	32	92	1.0, 2.0
MS-PT1-CR-4-1800-240-00-18-084-RD-SC	18	18	24	84	1.0, 2.0
MS-PT1-CR-4-1800-320-00-18-092-RD-SC	18	18	32	92	1.0, 2.0
MS-PT1-CR-4-2000-260-00-20-092-RD-SC	20	20	26	92	1.0, 2.0
MS-PT1-CR-4-2000-380-00-20-104-RD-SC	20	20	38	104	1.0, 2.0



CORNER RADIUS END MILL - Z5



units in mm

CODE	DC	DCON	APMX	OAL	RD (CR RADIUS)
MS-PT1-CR-5-0300-050-00-06-050-RD-SC	3	6	5	50	0.3, 0.5
MS-PT1-CR-5-0300-080-00-06-057-RD-SC	3	6	8	57	0.3, 0.5
MS-PT1-CR-5-0400-080-00-06-054-RD-SC	4	6	8	54	0.3, 0.5
MS-PT1-CR-5-0400-110-00-06-057-RD-SC	4	6	11	57	0.3, 0.5
MS-PT1-CR-5-0500-090-00-06-054-RD-SC	5	6	9	54	0.5, 1.0
MS-PT1-CR-5-0500-130-00-06-057-RD-SC	5	6	13	57	0.5, 1.0
MS-PT1-CR-5-0600-100-00-06-054-RD-SC	6	6	10	54	0.5, 1.0
MS-PT1-CR-5-0600-130-00-06-057-RD-SC	6	6	13	57	0.5, 1.0
MS-PT1-CR-5-0800-120-00-08-058-RD-SC	8	8	12	58	0.5, 1.0
MS-PT1-CR-5-0800-190-00-08-063-RD-SC	8	8	19	63	0.5, 1.0
MS-PT1-CR-5-1000-140-00-10-066-RD-SC	10	10	14	66	0.5, 1.0
MS-PT1-CR-5-1000-220-00-10-072-RD-SC	10	10	22	72	0.5, 1.0
MS-PT1-CR-5-1200-160-00-12-073-RD-SC	12	12	16	73	0.5, 1.0, 2.0
MS-PT1-CR-5-1200-260-00-12-083-RD-SC	12	12	26	83	0.5, 1.0, 2.0
MS-PT1-CR-5-1400-180-00-14-075-RD-SC	14	14	18	75	1.0, 2.0
MS-PT1-CR-5-1400-260-00-14-083-RD-SC	14	14	26	83	1.0, 2.0
MS-PT1-CR-5-1600-220-00-16-082-RD-SC	16	16	22	82	1.0, 2.0
MS-PT1-CR-5-1600-320-00-16-092-RD-SC	16	16	32	92	1.0, 2.0
MS-PT1-CR-5-1800-240-00-18-084-RD-SC	18	18	24	84	1.0, 2.0
MS-PT1-CR-5-1800-320-00-18-092-RD-SC	18	18	32	92	1.0, 2.0
MS-PT1-CR-5-2000-260-00-20-092-RD-SC	20	20	26	92	1.0, 2.0
MS-PT1-CR-5-2000-380-00-20-104-RD-SC	20	20	38	104	1.0, 2.0



Carbide Tool Reconditioning

Our contribution for sustainable living in partnership with our customers

We enable our customers to support their environmental programs



Carbide Recycling

“Preserve, Protect, and Nurture Nature!”

For Further Enquiries

M.S. Tools & Manufacturing Company Pvt. Ltd.

Manufacturing Facility:


Chennai, Bengaluru

Sales:

PAN India



Manufacturing
Sales



scan the QR
for more info..

+91 93448 07872

info@mstm.co.in

www.mstm.co.in